


# ACRYLIC BODY ROTAMETER


## SPECIFICATIONS MODEL FL-A, FL-B

Meter Body	Acrylic	Connection	Threaded BSP/NPT Female or Male
Float	SS 316, PTFE, PVC etc.	Accuracy of	Model 10,20 & 30 $\pm 3\%$
Wetted Parts	SS, PVC, P.P, PTFE etc.	Full Scale	Model 40 & 50 $\pm 2\%$
O-Rings	Neoprene, PTFE Silicon etc.	Repeatability	0.5%
Scale	Engraved on Body	Rangeability	10:1
Temp. Rating	160°F		

FL-A

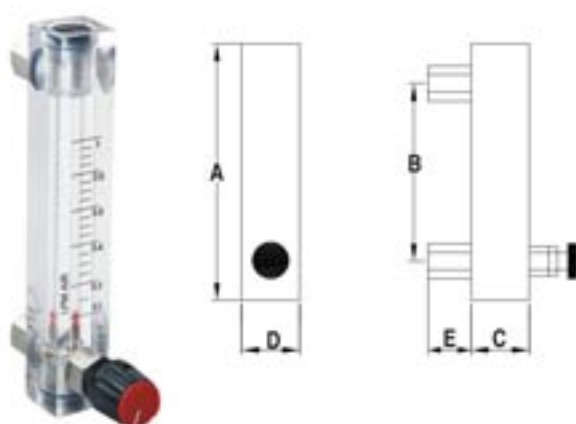

FL-B

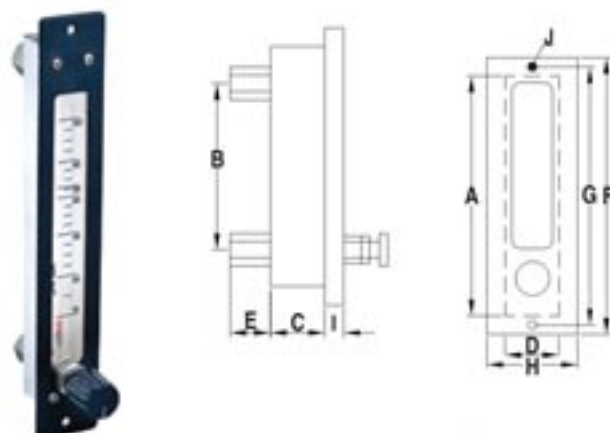

## SERIES FL-A & FL-B MODEL & RANGES

Model FL-A/FL-B	Ambient Temperature		Pressure Rating Maximum
	Air LPM	Water LPH	
10	0.1-1	0.4-5	3 Kg/Cm <sup>2</sup>
	0.2-2	1-10	
	0.4-5	3-30	
	1-10	5-50	
	2-20	10-100	
	3-30	15-150	
20	4-50	20-200	5 Kg/Cm <sup>2</sup>
30	15-150	25-250	
	15-160	50-500	
	30-300		
40	40-500	100-1000	
	80-800	250-2500	
	140-1400		



## OVERALL DIMENSIONS (MM) FL-A, FL-B

Model FLA/FLB	A	B	C	D	E	F	G	H	I	J HOLE $\phi$	Connection BSP" F"
10	150	114	28	28	20	180	166	32	3	5	1/4"
15	150	110	35	28	20	180	166	38	3	5	1/4"
20	195	159	28	28	20	225	210	38	3	5	1/4"
30	250	200	40	40	25	290	275	52	3	5	1/2"
35	250	194	48	42	25	290	275	52	3	5	1/4"